



防爆电气设备

防爆合格证

国家防爆

Cer. No.: CNEx09.0286

Manufacturer R.STAHL Schaltgeräte GmbH
Address: Am Bahnhof 30, 74638 Waldenburg(Württ.), Germany)

Name of Product Floodlight

Type of Product 6521/3****_* **_***_***_**

Marking ExnR II T*, DIP A21 TA T*°C

Standard _____

Drawing No. 65 210 02 00 0, 65 210 03 00 0, 65 210 04 00 0

The drawings, technical documents and the samples are verified and certified according to standard(s) for safety as below:
GB3836.8-2003 Electrical Apparatus for Explosive Gas atmospheres - Part 8: Type of protection "n"
GB12476.1-2000 Electrical apparatus for use in the presence of combustible dust-Part 1-1: Electrical apparatus protected by enclosures and surface temperature limitation-Specification for apparatus

Note See the appendix (total 3 pages).

Valid Date From February 19, 2009 to February 18, 2014

Issue Date February 19, 2009

Director




国家防爆电气产品质量监督检验中心

地址: 中国河南省南阳市仲景北路20号 邮政编码: 473008

电话: 0377-63258564 传真: 0377-63208175 [Http://www.china-ex.com](http://www.china-ex.com)





国家防爆

防爆电气设备


防爆合格证(附页)

Page 1 of 3

Cer. No.: CNEx09.0286

1. Type Designation:

Flood light

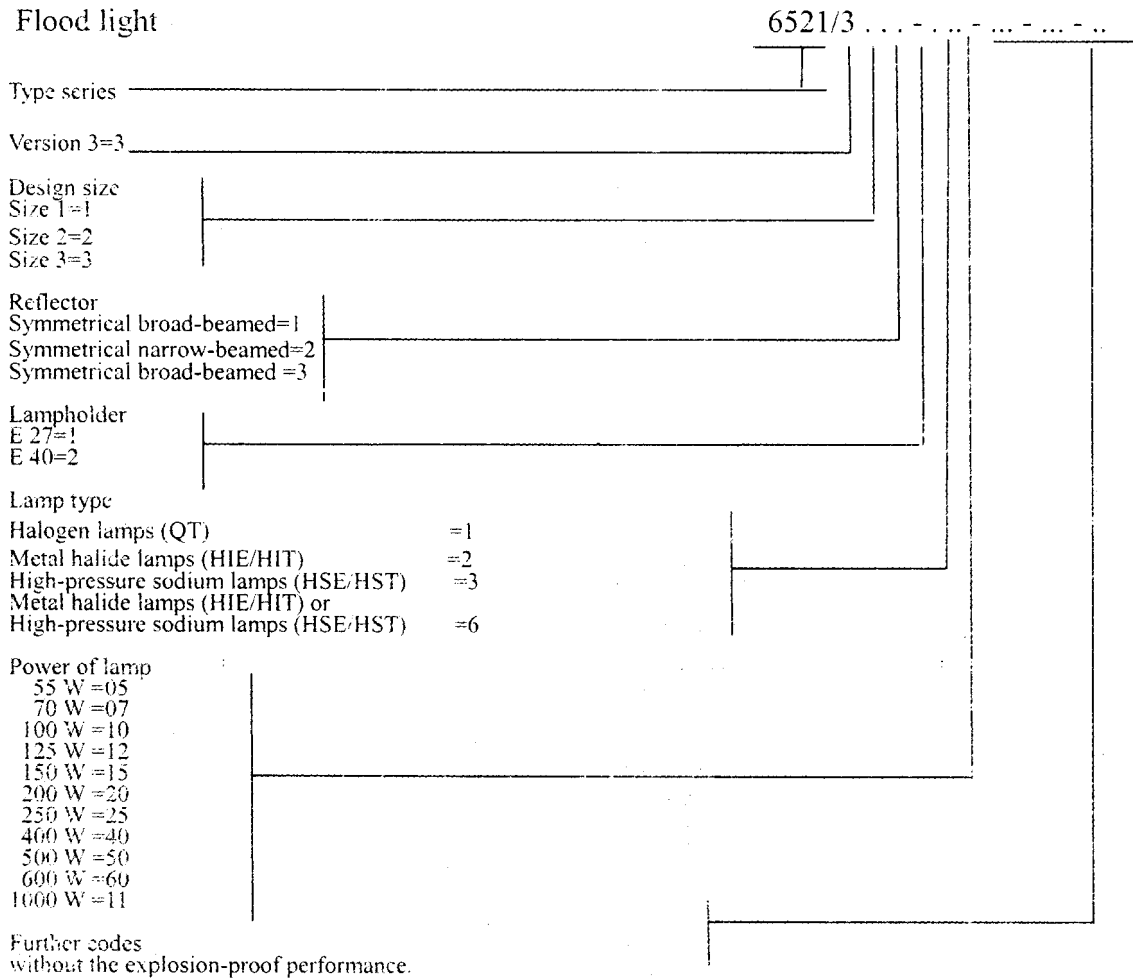

Valid Date From February 19, 2009 to February 18, 2014

Issue Date February 19, 2009

Director




国家防爆电气产品质量监督检验中心

地址: 中国河南省南阳市仲景北路20号 邮政编码: 473008

电话: 0377-63258564 传真: 0377-63208175 [Http://www.china-ex.com](http://www.china-ex.com)





国家防爆

防爆电气设备

防爆合格证(附页)

Page 2 of 3

Cer. No.: CNEx09.0286

2. Electrical data:

Rated voltage: 250VAC

Frequency: 50/60Hz

3. Degree of protection: IP66

4. Temperature class and Max. surface temperature:

Type 6521/31

Lamp	Lamp power	Temperature class		Max. surface temperature	
		Ta 40°C	Ta 50°C	Ta 40°C	Ta 50°C
QT	Max. 150W	T3	T3	156°C	166°C
QT	Max. 250W	T2	T2	202°C	222°C
HIE/HIT or HSE/HST	Max. 70W	T4	T3	121°C	131°C
HIE/HIT	Max. 100W	T3	T3	140°C	150°C
HIE/HIT	Max. 150W	T3	---	165°C	--

Type 6521/32

Lamp	Lamp power	Temperature class		Max. surface temperature	
		Ta 40°C	Ta 50°C	Ta 40°C	Ta 50°C
QT	Max. 500W	T3	T3	180°C	190°C
HSE/HST	Max. 150W	T4	T3	130°C	140°C
HIE/HIT or HSE/HST	Max. 250W	T3	T3	156°C	166°C

Valid Date From February 19, 2009 to February 18, 2014

Issue Date February 19, 2009

Director



国家防爆电气产品质量监督检验中心

地址: 中国河南省南阳市仲景北路20号 邮政编码: 473008

电话: 0377-63258564 传真: 0377-63208175 Http://www.china-ex.com





国家防爆

防爆电气设备

防爆合格证(附页)

Page 3 of 3

Cer. No.: CNEx09.0286

Type 6521/33

Lamp	Lamp power	Temperature class		Max. surface temperature	
		Ta 40°C	Ta 50°C	Ta 40°C	Ta 50°C
QT	Max. 500W	T3	T3	147°C	157°C
QT	Max. 1000W	T2	T2	230°C	240°C
HIE/HIT or HSE/HST	Max. 250W	T4	T3	125°C	135°C
HIE/HIT or HSE/HST	Max. 400W	T3	T3	160°C	170°C
HSE/HST	Max. 600W	T3	T2	190°C	200°C

Valid Date From February 19, 2009 to February 18, 2014

Issue Date February 19, 2009

Director



国家防爆电气产品质量监督检验中心

地址: 中国河南省南阳市仲景北路20号 邮政编码: 473008

电话: 0377-63258564 传真: 0377-63208175 Http://www.china-ex.com

